



# 達振泡綿企業有限公司

## DA CHEN ENTERPRISE CO., LTD

英國 Zote Foams 授權經銷商

Since 1979，通過ISO-9001品質認證




歡迎特殊材質來樣訂製  
合作內外銷


# 各式泡綿

專業生產製造

工具器材類〈工具箱、機械配件防撞、空氣  
濾芯器材〉、隔音/消音/制震領域、醫療器  
材領域(護具)、清潔用品類、寢具類

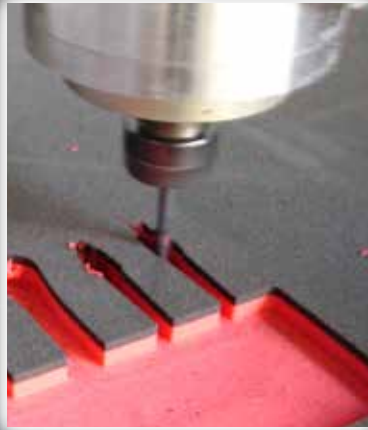

CNC-3D螺旋刀  
CNC-3D Rotating Blade

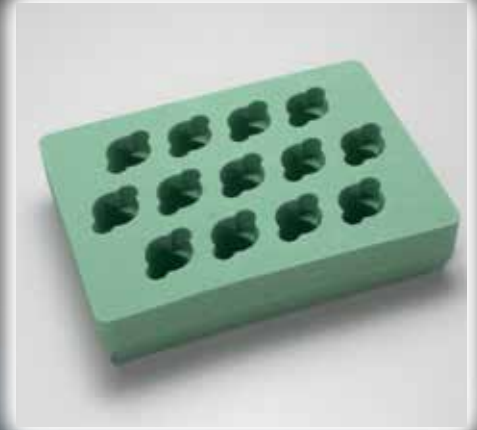

CNC-3D成品  
CNC-3D Finished Product




CNC-2D刀  
CNC-2D Blade



各類加工成品  
Various Products Processed by the Company




CNC-3D成品  
CNC-3D Finished Product

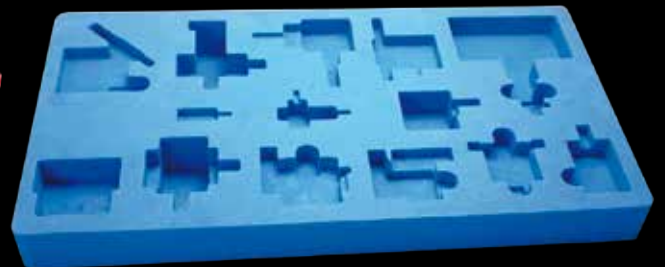

CNC-3D成品  
CNC-3D Finished Product



# MARSON 超靜吸音板

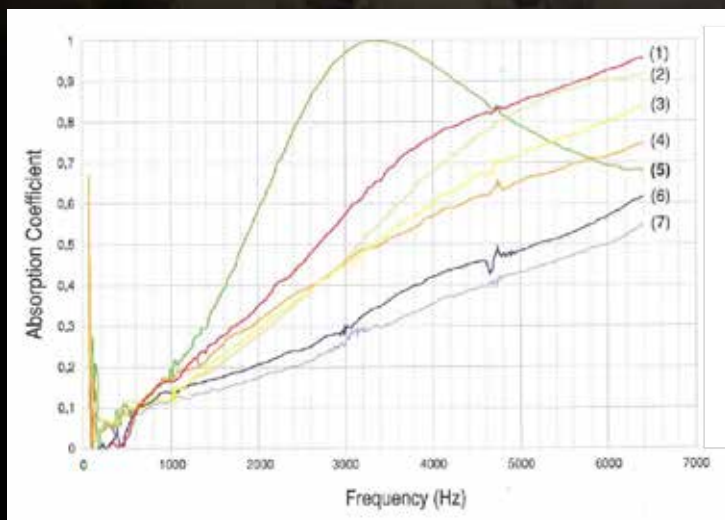

Absorption Coefficient : 吸音係數

Frequency (Hz) : 頻率 (Hz)

(1) Compact felt : 密實毛氈

(2) PU foam : 發泡聚氨酯(海綿)

(3) Mineral Wool/Fibre Glass : 礦物棉/玻  
璃棉

(4) Melamine foam : 三聚氰胺發泡

(5) MARSON超靜吸音板

(6) Polyester fibre : 聚酯纖維


(7) Impregnated PU : 浸漬型聚氨酯

應用場合	通常可降噪音(分貝)	MARSON超靜吸音板	對應標準
洗衣機	8 dB	10mm	/
真空吸塵器	10 dB(峰值)	6mm	/
普通隔音罩	可高達25 dB	10-25mm	/
發電機	可高達20 dB	15mm	歐盟噪音標準
電信設備	可高達20 dB	15mm	ETSI 300
風管內襯吸音	10-15 dB	15mm	/

備註：儘管上述降噪數據均是實際測得的數值，但也只能作為應用參考。由於具體應用的情況各不相同，在針對某一場合實際使用MARSON超靜吸音板時，其達到的降噪效果和上表數據可能會有偏差。


# MARSON

## 超靜吸音板

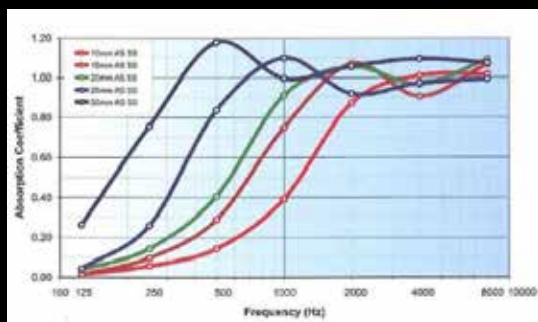

ArmaSound Super Silence的吸音性能						
倍頻程中心頻率(Hz)						
	125	250	500	1000	2000	4000
厚度						
(mm)	倍頻程吸聲係數 根據EN ISO 354					
10	0.04	0.04	0.12	0.30	0.74	1.14
15	0.01	0.08	0.26	0.69	1.13	1.03
20	0.04	0.14	0.51	1.08	0.95	1.14
25	0.05	0.16	0.58	1.14	1.01	1.22
50	0.26	0.76	1.12	0.86	0.99	1.12

加權吸聲係數 根據EN ISO 11654					
厚度	10mm	15mm	20mm	25mm	50mm
$\alpha_w$ class	0.20(MH) E	0.30(MH) D	0.45(MH) D	0.50(MH) D	1 A
降噪係數(NRC) 根據ASTM C 423					
	0.30	0.55	0.65	0.70	0.95

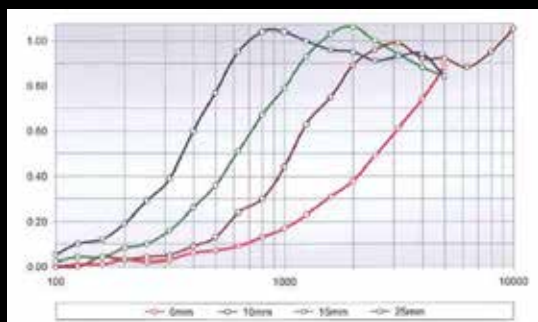

ArmaSound RD 240的吸音性能						
倍頻程中心頻率(Hz)						
	125	250	500	1000	2000	4000
厚度						
(mm)	倍頻程吸聲係數 根據EN ISO 354					
6	0.01	0.03	0.07	0.18	0.39	0.74
10	0.01	0.04	0.15	0.46	0.87	0.94
15	0.03	0.11	0.38	0.80	1.03	0.89
25	0.09	0.28	0.77	1.03	0.94	0.90
50	0.26	0.76	1.12	0.86	0.99	1.12

加權吸聲係數 根據EN ISO 11654				
厚度	6mm	10mm	15mm	25mm
$\alpha_w$ class	0.15(MH) E	0.25(MH) E	0.40(MH) D	0.60(MH) C
降噪係數(NRC) 根據ASTM C 423				
	0.15	0.40	0.60	0.75






品名 Product	產品說明 Description	
 <p>C-460耐燃波浪泡綿 2.5CM*116CM*300CM 每件1.1坪+單背1156膠</p> <p>C-460 Flame-retardant Wave Foam 2.5CM*116CM*300CM 1.1 pings per piece + 1156 single-side self-adhesive sticker</p>	吸音綿等級 Acoustic Foam Classification	24kg/m <sup>3</sup> C-460耐燃泡綿：加州耐燃117UL94 V1等級 C-460 Flame-retardant Foam: California Flame Classification 117UL94 V1
		30kg/m <sup>3</sup> TFF耐燃泡綿：加州耐燃117UL94 V1等級 TFF Flame-retardant Foam: California Flame Classification 117UL94 V1
		40kg/m <sup>3</sup> TPU025泡綿：加州耐燃117UL94 V1等級 TPU025 Foam: California Flame Classification 117UL94 V1
		55kg/m <sup>3</sup> T-505耐燃泡綿：加州耐燃117UL94 V1等級 T-505 Flame-retardant Foam: California Flame Classification 117UL94 V1
	使用壽命 Lifespan	室內：5~10年；室外：2~3年 Indoor: 5 ~ 10 years; Outdoor: 2 ~ 3 years
泡綿耐溫 Temperature Resistance	耐熱：150° C；耐冷：-30° C Range of Temperature Resistance: 150° C ~ -30° C	
阻隔效果 Insulation	高頻：15%；低頻：20% High Frequency: 15%; Low Frequency: 20%	
 <p>C-460耐燃波浪泡綿 3.8CM*116CM*300CM 每件1.1坪+單背1156膠</p> <p>C-460 Flame-retardant Wave Foam 3.8CM*116CM*300CM 1.1 pings per piece + 1156 single-side self-adhesive sticker</p>	吸音綿等級 Acoustic Foam Classification	24kg/m <sup>3</sup> C-460耐燃泡綿：加州耐燃117UL94 V1等級 C-460 Flame-retardant Foam: California Flame Classification 117UL94 V1
		30kg/m <sup>3</sup> TFF耐燃泡綿：加州耐燃117UL94 V1等級 TFF Flame-retardant Foam: California Flame Classification 117UL94 V1
		40kg/m <sup>3</sup> TPU025泡綿：加州耐燃117UL94 V1等級 TPU025 Foam: California Flame Classification 117UL94 V1
		55kg/m <sup>3</sup> T-505耐燃泡綿：加州耐燃117UL94 V1等級 T-505 Flame-retardant Foam: California Flame Classification 117UL94 V1
	使用壽命 Lifespan	室內：5~10年；室外：2~3年 Indoor: 5 ~ 10 years; Outdoor: 2 ~ 3 years
泡綿耐溫 Temperature Resistance	耐熱：150° C；耐冷：-30° C Range of Temperature Resistance: 150° C ~ -30° C	
阻隔效果 Insulation	高頻：20%；低頻：25% High Frequency: 20%; Low Frequency: 25%	
 <p>C-460耐燃波浪泡綿 5CM*116CM*300CM 每件1.1坪+單背1156膠</p> <p>C-460 Flame-retardant Wave Foam 5CM*116CM*300CM 1.1 pings per piece + 1156 single-side self-adhesive sticker</p>	吸音綿等級 Acoustic Foam Classification	24kg/m <sup>3</sup> C-460耐燃泡綿：加州耐燃117UL94 V1等級 C-460 Flame-retardant Foam: California Flame Classification 117UL94 V1
		30kg/m <sup>3</sup> TFF耐燃泡綿：加州耐燃117UL94 V1等級 TFF Flame-retardant Foam: California Flame Classification 117UL94 V1
		40kg/m <sup>3</sup> TPU025泡綿：加州耐燃117UL94 V1等級 TPU025 Foam: California Flame Classification 117UL94 V1
		55kg/m <sup>3</sup> T-505耐燃泡綿：加州耐燃117UL94 V1等級 T-505 Flame-retardant Foam: California Flame Classification 117UL94 V1
	使用壽命 Lifespan	室內：5~10年；室外：2~3年 Indoor: 5 ~ 10 years; Outdoor: 2 ~ 3 years
泡綿耐溫 Temperature Resistance	耐熱：150° C；耐冷：-30° C Range of Temperature Resistance: 150° C ~ -30° C	
阻隔效果 Insulation	高頻：40%；低頻：35% High Frequency: 40%; Low Frequency: 35%	

噪音、振動需要有效的抑制 (NVH) 的不平順度。噪音是環境的殺手，也是你我不可忽視的公敵。達振公司為您的生活品質把關。

Noise, vibration and hardness (NVH) issues require effective solutions; in particular, the noise is an environmental pollution that cannot be ignored. Da Chen Enterprise Co., Ltd. helps you create a good quality life.



品名 Product	產品說明 Description		
 <p>C-460耐燃波浪泡綿 (5+2.5)CM*116CM*300CM 每件1.1坪+單背1156膠</p> <p>C-460 Flame-retardant Wave Foam (5+2.5)CM*116CM*300CM 1.1 pings per piece + 1156 single-side self-adhesive sticker</p>	吸音綿等級 Acoustic Foam Classification	24kg/m3	C-460耐燃泡綿：加州耐燃117UL94 V1等級 C-460 Flame-retardant Foam: California Flame Classification 117UL94 V1
		30kg/m3	TFF耐燃泡綿：加州耐燃117UL94 V1等級 TFF Flame-retardant Foam: California Flame Classification 117UL94 V1
		40kg/m3	TPU025泡綿：加州耐燃117UL94 V1等級 TPU025 Foam: California Flame Classification 117UL94 V1
		55kg/m3	T-505耐燃泡綿：加州耐燃117UL94 V1等級 T-505 Flame-retardant Foam: California Flame Classification 117UL94 V1
	使用壽命 Lifespan	室內：5~10年；室外：2~3年 Indoor: 5~10 years; Outdoor: 2~3 years	
泡綿耐溫 Temperature Resistance	耐熱：150° C；耐冷：-30° C Range of Temperature Resistance: 150° C ~ -30° C		
阻隔效果 Insulation	高頻：55%；低頻：45% High Frequency: 55%; Low Frequency: 45%		
 <p>C-460耐燃波浪吸音+隔音板 (2.5+0.5)CM*116CM*300CM 每件1.1坪+單背1156膠</p> <p>C-460 Flame-retardant Acoustic Wave Foam + Sound Insulation Board (2.5+0.5)CM*116CM*300CM 1.1 pings per piece + 1156 single-side self-adhesive sticker</p>	吸音綿等級 Acoustic Foam Classification	24kg/m3	C-460耐燃泡綿：加州耐燃117UL94 V1等級 C-460 Flame-retardant Foam: California Flame Classification 117UL94 V1
		30kg/m3	TFF耐燃泡綿：加州耐燃117UL94 V1等級 TFF Flame-retardant Foam: California Flame Classification 117UL94 V1
		40kg/m3	TPU025泡綿：加州耐燃117UL94 V1等級 TPU025 Foam: California Flame Classification 117UL94 V1
		55kg/m3	T-505耐燃泡綿：加州耐燃117UL94 V1等級 T-505 Flame-retardant Foam: California Flame Classification 117UL94 V1
	使用壽命 Lifespan	室內：5~10年；室外：2~3年 Indoor: 5~10 years; Outdoor: 2~3 years	
泡綿耐溫 Temperature Resistance	耐熱：150° C；耐冷：-30° C Range of Temperature Resistance: 150° C ~ -30° C		
阻隔效果 Insulation	高頻：30%；低頻：35% High Frequency: 30%; Low Frequency: 35%		
 <p>C-460耐燃波浪吸音+隔音板 (3.8+0.5)CM*116CM*300CM 每件1.1坪+單背1156膠</p> <p>C-460 Flame-retardant Acoustic Wave Foam + Sound Insulation Board (3.8+0.5)CM*116CM*300CM 1.1 pings per piece + 1156 single-side self-adhesive sticker</p>	吸音綿等級 Acoustic Foam Classification	24kg/m3	C-460耐燃泡綿：加州耐燃117UL94 V1等級 C-460 Flame-retardant Foam: California Flame Classification 117UL94 V1
		30kg/m3	TFF耐燃泡綿：加州耐燃117UL94 V1等級 TFF Flame-retardant Foam: California Flame Classification 117UL94 V1
		40kg/m3	TPU025泡綿：加州耐燃117UL94 V1等級 TPU025 Foam: California Flame Classification 117UL94 V1
		55kg/m3	T-505耐燃泡綿：加州耐燃117UL94 V1等級 T-505 Flame-retardant Foam: California Flame Classification 117UL94 V1
	使用壽命 Lifespan	室內：5~10年；室外：2~3年 Indoor: 5~10 years; Outdoor: 2~3 years	
泡綿耐溫 Temperature Resistance	耐熱：150° C；耐冷：-30° C Range of Temperature Resistance: 150° C ~ -30° C		
阻隔效果 Insulation	高頻：35%；低頻：40% High Frequency: 35%; Low Frequency: 40%		

噪音、振動需要有效的抑制 (NVH) 的不平順度。噪音是環境的殺手，也是你我不可忽視的公敵。達振公司為您的生活品質把關。

Noise, vibration and hardness (NVH) issues require effective solutions; in particular, the noise is an environmental pollution that cannot be ignored. Da Chen Enterprise Co., Ltd. helps you create a good quality life.



品名 Product	產品說明 Description		
 <p>C-460耐燃波浪吸音+隔音板 (5+0.5)CM*116CM*300CM 每件1.1坪+單背1156膠</p> <p>C-460 Flame-retardant Acoustic Wave Foam + Sound Insulation Board (5+0.5)CM*116CM*300CM 1.1 pings per piece + 1156 single-side self-adhesive sticker</p>	吸音綿等級 Acoustic Foam Classification	24kg/m3	C-460耐燃泡綿：加州耐燃117UL94 V1等級 C-460 Flame-retardant Foam: California Flame Classification 117UL94 V0
		30kg/m3	TFF耐燃泡綿：加州耐燃117UL94 V1等級 TFF Flame-retardant Foam: California Flame Classification 117UL94 V0
		40kg/m3	TPU025泡綿：加州耐燃117UL94 V1等級 TPU025 Foam: California Flame Classification 117UL94 V0
		55kg/m3	T-505耐燃泡綿：加州耐燃117UL94 V1等級 T-505 Flame-retardant Foam: California Flame Classification 117UL94 V0
	使用壽命 Lifespan	室內：5~10年；室外：2~3年 Indoor: 5~10 years; Outdoor: 2~3 years	
泡綿耐溫 Temperature Resistance	耐熱：150° C；耐冷：-30° C Range of Temperature Resistance: 150° C ~ -30° C		
阻隔效果 Insulation	高頻：55%；低頻：50% High Frequency: 55%; Low Frequency: 50%		
 <p>C-460耐燃波浪吸音+隔音板 (5+2.5+0.5)CM*116CM*300CM 每件1.1坪+單背1156膠</p> <p>C-460 Flame-retardant Acoustic Wave Foam + Sound Insulation Board (5+2.5+0.5)CM*116CM*300CM 1.1 pings per piece + 1156 single-side self-adhesive sticker</p>	吸音綿等級 Acoustic Foam Classification	24kg/m3	C-460耐燃泡綿：加州耐燃117UL94 V1等級 C-460 Flame-retardant Foam: California Flame Classification 117UL94 V1
		30kg/m3	TFF耐燃泡綿：加州耐燃117UL94 V1等級 TFF Flame-retardant Foam: California Flame Classification 117UL94 V1
		40kg/m3	TPU025泡綿：加州耐燃117UL94 V1等級 TPU025 Foam: California Flame Classification 117UL94 V1
		55kg/m3	T-505耐燃泡綿：加州耐燃117UL94 V1等級 T-505 Flame-retardant Foam: California Flame Classification 117UL94 V1
	使用壽命 Lifespan	室內：5~10年；室外：2~3年 Indoor: 5~10 years; Outdoor: 2~3 years	
泡綿耐溫 Temperature Resistance	耐熱：150° C；耐冷：-30° C Range of Temperature Resistance: 150° C ~ -30° C		
阻隔效果 Insulation	高頻：70%；低頻：60% High Frequency: 70%; Low Frequency: 60%		
 <p>NBR-COB -波浪 1.8~2CM*100CM*100CM</p> <p>NBR-COB - Wave 1.8~2CM*100CM*100CM</p>	吸音綿等級 Acoustic Foam Classification	加州耐燃117UL94 V0級 California Flame Classification 117UL94 V0	
	使用壽命 Lifespan	室內外：5~10年 Indoor & Outdoor: 5~10 years	
	泡綿耐溫 Temperature Resistance	耐熱：150° C；耐冷：-30° C Range of Temperature Resistance: 150° C ~ -30° C	
阻隔效果 Insulation	高頻：15%；低頻：20% High Frequency: 15%; Low Frequency: 20%		

噪音、振動需要有效的抑制 (NVH) 的不平順度。噪音是環境的殺手，也是你我不可忽視的公敵。達振公司為您的生活品質把關。

Noise, vibration and hardness (NVH) issues require effective solutions; in particular, the noise is an environmental pollution that cannot be ignored. Da Chen Enterprise Co., Ltd. helps you create a good quality life.





品名 Product	產品說明 Description	
 <p>NBR-COB - 平面 2.5CM *100CM*200CM</p> <p>NBR-COB - Plane 2.5CM *100CM*200CM</p>	吸音綿等級 Acoustic Foam Classification	加州耐燃117UL94 V0級 California Flame Classification 117UL94 V0
	使用壽命 Lifespan	室內外：5~10年 Indoor & Outdoor: 5~10 years
	泡綿耐溫 Temperature Resistance	耐熱：150° C；耐冷：-30° C Range of Temperature Resistance: 150° C ~ -30° C
	阻隔效果 Insulation	高頻：20%；低頻：25% High Frequency: 20%; Low Frequency: 25%
 <p>T501波浪防震記憶泡綿 2.5CM *1米 *1.8米</p> <p>T501 Shock-absorption Wave Memory Foam 2.5CM*1M*1.8M</p>	密度等級 Density Level	38 kg/m3 . 55 kg/m3 . 65 kg/m3 . 80 kg/m3
	可製作厚度 Available Thickness	2.5CM . 3.8CM . 5CM .
	防震係數 Shock- absorption Coefficient	75%
	使用壽命 Lifespan	室內外：5~10年 Indoor & Outdoor: 5~10 years
	泡綿耐溫 Temperature Resistance	耐熱：110° C；耐冷：-5° C Range of Temperature Resistance: 110° C ~ -5° C
阻隔效果 Insulation	高頻：55%；低頻：50% High Frequency: 55%; Low Frequency: 50%	

噪音、振動需要有效的抑制 (NVH) 的不平順度。噪音是環境的殺手，也是你我不可忽視的公敵。達振公司為您的生活品質把關。

Noise, vibration and hardness (NVH) issues require effective solutions; in particular, the noise is an environmental pollution that cannot be ignored. Da Chen Enterprise Co., Ltd. helps you create a good quality life.

## 剖料設備 Splitting Equipment



## 裁斷設備 Cutting Equipment



## 切料設備

### Material Trimming Equipment




## 沖孔設備

### Punching Equipment




## 2D機台設備


### 2D Cutting Machine

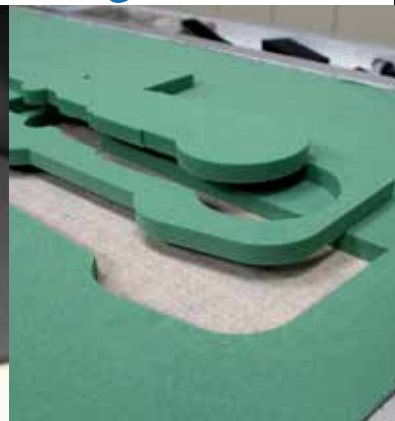

## 3D機台設備 3D Cutting Machine

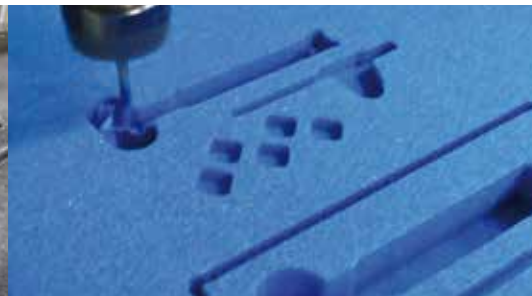

## 展覽活動花絮 Exhibition Highlights

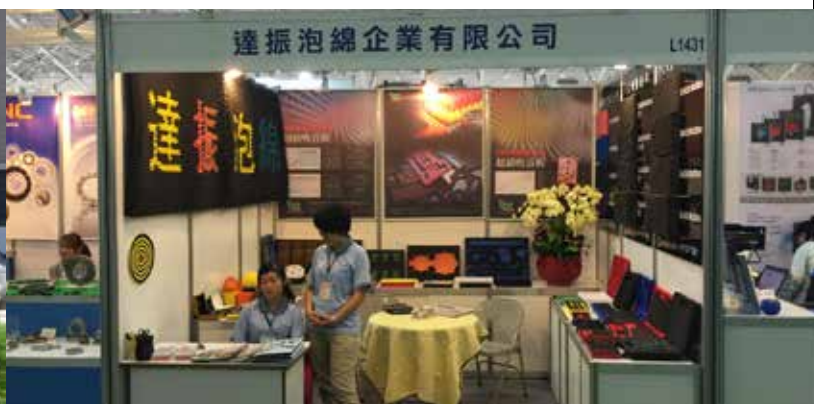

達振泡綿企業有限公司成立於西元1979年，專業生產製造各式泡綿，通過ISO-9001品質認證，秉持『邁向一流品質，創造顧客滿意』為永續經營的理念，以最優異的品質、最快的生產速度及最好的產品價格服務客戶。

Founded in 1979, Da Chen Enterprise Co., Ltd. specializes in manufacturing of all sorts of foam products and receives the ISO-9001 Quality Certification. We uphold the sustainable business development concept of "producing best quality products to achieve customer satisfaction" and provide our customers with products featuring best quality, shortest lead time, and most competitive price.



歡迎特殊材質來樣訂製 合作內外銷

# DA CHEN

材質：PU泡綿(連續式)、隔音耐燃泡綿、凹凸波浪泡綿、聚合泡綿、記憶泡綿、EVA、高發泡、電子IXPE、EPE板管類、NBR發泡版管類、橡膠發泡(SBR、CR、EPDM)、PVC發泡止滑網、菜瓜布、進口泡綿、PU灌注成型之各類發泡產品。

用途：機械產業、電子產業、半導體產業、面板業、顯示器、電器產業、五金、手工具、包裝材料、一般用途…。

Material: PU foam (Continuous Type), fire-retardant acoustic foam, wave foam, polymer foam, memory foam, EVA, high-blown foam, IXPE foam for Electronics, EPE boards and tubes, NBR foam boards and tubes, rubber foam (SBR, CR, EPDM), PVC foam slip-resistant mesh, scouring pad, imported foam, PU injection molded foam products.

Scope of Application: mechanical industry, electronic industry, semiconductor industry, panel industry, display products, electric appliance industry, hardware, hand tools, packaging material, etc.

We receive custom-made orders with special materials and accept domestic and overseas distribution cooperation.





實品圖所採用的LD33及LD45進口料，均為符合歐盟REACH法規及RoHS標準之原料。  
All LD33 and LD45 imported materials shown in the foregoing pictures are standard materials compliant with the REACH and RoHS requirements of the European Union.

# DIY 撕拉泡綿

可自由放置商品，先規劃位置，想放什麼再挖洞  
提供儀器、工具、展覽品等最好的保護。  
材質: PU泡綿及PE泡綿

**TO DO ONE THING WELL IS A WORTHY AMBITION**

We receive custom-made orders with special materials and accept domestic and overseas distribution cooperation.

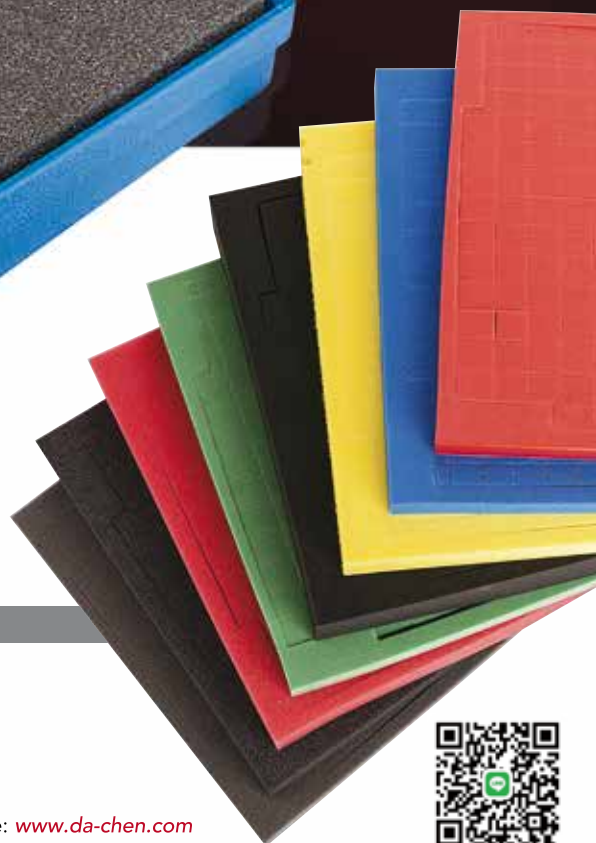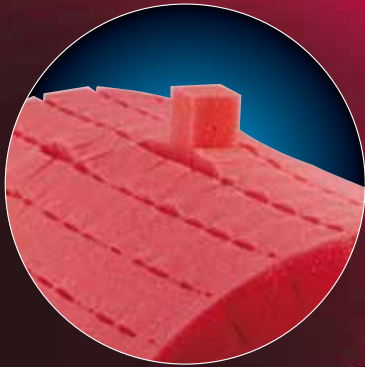

Since 1979

ISO 9001

歡迎特殊材質來樣訂製 合作內外銷

達振泡綿企業有限公司

**DA CHEN ENTERPRISE CO., LTD**

No.38, Fenggong S. Rd., Shengang Dist., Taichung City 429, Taiwan

429 臺中市神岡區豐工南路38號(豐洲科技園區)

Tel:+886-4-25254815 ■ Fax:+886-4-25231647 ■ Email:dachen@da-chen.com ■ website: [www.da-chen.com](http://www.da-chen.com)

